




McCall.



F-6E



FS-10E



McCall Refrigeration specification sheets are available online @ www.mccallrefrigeration.com

ITEM # _____	SIS # _____	AIA # _____
MODEL # _____		
PROJECT NAME _____		

FREEZER UNDERCOUNTER UNITS

27" Wide Models:

FS-6E, FSC-6E, F-6E

45" Wide Models:

FS-10E, FSC-10E, F-10E

Standard Features

- "One-shot" high pressure foamed-in-place polyurethane insulation
- Electric defrost system
- Stainless steel fronts, doors, top and exterior ends
- Self-closing doors with safety stops and stay open features
- One-piece removable magnetic door gaskets

Approval : _____

SPECIFICATIONS

Cabinet - Stainless steel top, front, door(s) and exterior ends. All metal, welded construction. All joints and seams closed and sealed. Enclosed rear with removable machine compartment panel, Zinc coated steel exterior bottom and rear with coved, sanitary aluminum interior (S/S interior available if specified.). The unit is supported by 6" minimum height adjustable legs with non-marring feet.

Doors - Self-closing with full face S/S exterior and aluminum inner pan standard, stainless steel optional. Door insulated with one-shot, polyurethane and one piece vinyl, self-adjusting magnetic gasket keyed into a thermal-breaker retainer frame. Gaskets are removable without tools for cleaning. All door openings have full perimeter minimum-wattage anti-condensate heaters behind the S/S fascia to retard condensation. One piece door pull with concealed self-closing hinge mechanism, safety stops and stay

open feature. Doors on the single section models are reversible and can be quickly rehinged without special tools (with additional hardware). They are shipped from factory hinged on the right, facing cabinet.

Insulation - Entire cabinet and door insulated with special, extra rigid one-shot, high pressure, foamed-in-place, closed cell polyurethane, average thickness 2".

Interior Shelves - Two heavy-duty, adjustable, removable epoxy coated shelves are furnished for each door section.


Self-Contained Refrigeration - The system is a forced-air, electric defrost, hermetic design with R-404A refrigeration, capillary-metering device, and automatic, thermostat and timer. It is self-contained with air-cooled, condensing unit and a high-efficiency, space-saver evaporator with fin

coil for extra long life. The defrost system is time-initiated, with a built-in, auxiliary, safety cut off. This system is capable of maintaining a cabinet temperature of 0°F average internal air temperature. All models are complete with a removable, energy free automatic condensate evaporator. No floor drain or plumbing connections required.


Tops - All freezer models are available with full size S/S counter tops and matching integral S/S back splash and receptacle cutout complete with chrome plated cover plate. S/S counter top models are available with full size, removable, reversible, removable/reversible synthetic cutting board. All freezer models are available with S/S flat tops for undercounter and built-in applications.

All units are performance tested on the production line prior to shipping.

SIDE VIEW

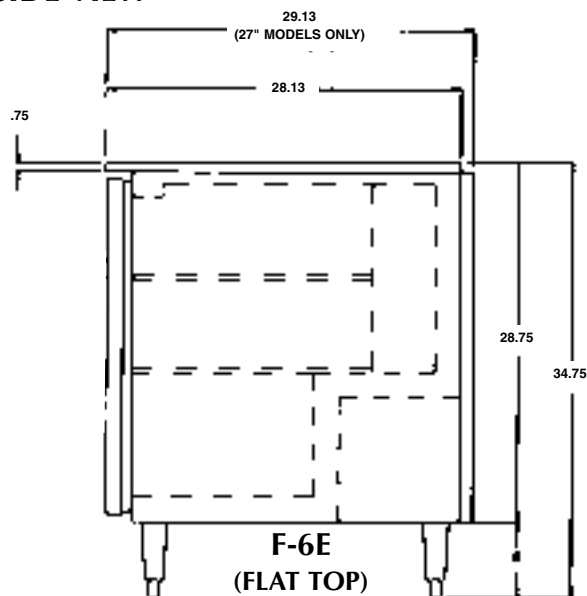

SIDE VIEW

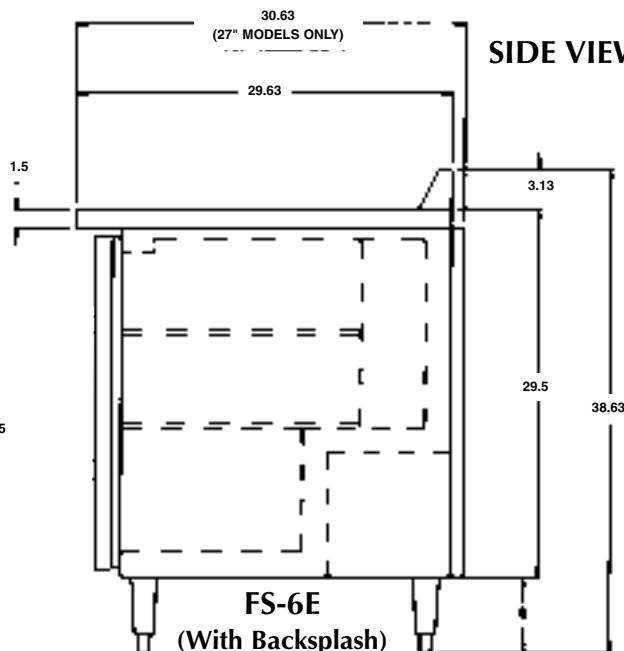

STATISTICS

Single Door (27")

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Shelf Area (Sq. Ft.)	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
FS-6E	7	27"	30.63"	35.50"	7	S/S Top & Backsplash	1/3	1285	8.0	210 lbs.
FSC-6E	7	27"	30.63"	36.0"	7	S/S Top & Backsplash w/Cutting Board	1/3	1285	8.0	220 lbs.
F-6E	7	27"	29.13"	34.75"	7	S/S Flat Top Underctr	1/3	1285	8.0	210 lbs.

Two Door (45")

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Shelf Area (Sq. Ft.)	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
FS-10E	12	45"	29.63"	35.50"	12.74	S/S Top & Backsplash	1/3	1285	8.5	290 lbs.
FSC-10E	12	45"	29.63"	36.0"	12.74	S/S Top & Backsplash w/Cutting Board	1/3	1285	8.5	300 lbs.
F-10E	12	45"	28.13"	34.75"	12.74	S/S Flat Top Underctr	1/3	1285	8.5	290 lbs.

115 volt, 60 Hertz, 1 phase, 6'-0" (1.85 m.) power cord and plug. (NEMA 5-15)

* Based on 90°F ambient and -20°F evaporating temperature

Specifications are subject to change without notice.

Bidding Specifications

McCall Undercounter Freezers shall have:

Stainless steel front, door(s) and exterior ends. One-shot high-pressure, foamed in place polyurethane insulation. Automatic defrost system. All metal constructions. Self closing doors. One-piece removable magnetic door gaskets. 6" adjustable legs. 115V, 60 cycle, single phase, 2 adjustable, epoxy-coated shelves per section. R-404A refrigerant. Cord and plug attached.

OPTIONS

Description

- Stainless steel interior
- Stainless steel exterior back and access panel
- Stainless steel overhead shelf
- Door lock, individual cylinder type
- Special dial thermometer, in backsplash models only
- Swivel casters: 6" load height for 27" models; 3 3/4", 5" and 6" load height for 45" and 59" models.

McCall Refrigeration / 81 West Holly Street / Parsons, TN 38363

Phone (731) 847-5570 / Fax (731) 847-9012 / 1-888-REACH-IN (1-888-732-2446) / www.mccallrefrigeration.com

October 2003 / Printed in U.S.A.