



**McCall.**



**R-6E**



**RS-10E**



McCall Refrigeration specification sheets are available online @ [www.mccallrefrigeration.com](http://www.mccallrefrigeration.com)

ITEM # _____	SIS # _____	AIA # _____
MODEL # _____		
PROJECT NAME _____		

# REFRIGERATED UNDERCOUNTER UNITS

## 27" Wide Models:

**RS-6E, RSC-6E, R-6E**

## 45" Wide Models:

**RS-10E, RSC-10E, R-10E**

## 59" Wide Models:

**RS-15E, RSC-15E, R-15E**

### Standard Features

- "One-shot" high pressure foamed-in-place polyurethane insulation
- Automatic defrost system
- Stainless steel fronts, doors, top and exterior ends
- Self-closing doors with safety stops and stay open features
- One-piece removable magnetic door gasket
- R-134a refrigerant

Approval : \_\_\_\_\_

## SPECIFICATIONS

**Cabinet** - Stainless steel top, front, door(s) and exterior ends. All metal, welded construction. All joints and seams closed and sealed. Enclosed rear with removable machine compartment panel, Zinc coated steel exterior bottom and rear with coved, sanitary aluminum interior (S/S interior available if specified). The unit is supported by 6" minimum height adjustable legs with non-marring feet.

**Doors** - Self-closing with full face S/S exterior and aluminum inner pan standard, stainless steel optional. Door insulated with one-shot, polyurethane and one piece vinyl, self-adjusting magnetic gasket keyed into a thermal-breaker retainer frame. Gaskets are removable without tools for cleaning. All door openings have full perimeter minimum-wattage anti-condensate heaters behind the S/S fascia to retard condensation. One piece door pull with concealed self-closing hinge mechanism, safety stops and stay

open feature. Doors on the single section models are reversible and can be quickly rehinged without special tools (with additional hardware). They are shipped from factory hinged on the right, facing cabinet.

**Insulation** - Entire cabinet and door insulated with special, extra rigid one-shot, high pressure, foamed-in-place, closed cell polyurethane, average thickness 2".

**Interior Shelves** - Two heavy-duty, adjustable, removable epoxy coated shelves are furnished for each door section.

**Self-Contained Refrigeration** - The system is a forced-air, automatic defrost, hermetic design with R-134a refrigerant, capillary-metering device, and automatic, adjustable thermostat. It is self-contained with air-cooled, condensing unit and a high-efficiency, space-saver evaporator with high-

humidity, fin coil for extra long life. This system is capable of maintaining a cabinet temperature of 38°F average internal air temperature. All models are complete with a removable, energy free automatic condensate evaporator. No floor drain or plumbing connections required.

**Tops** - All refrigerator models are available with full size S/S counter tops and matching integral S/S back splash and receptacle cutout complete with chrome plated cover plate. S/S counter top models are available with full size, removable, reversible, removable/reversible synthetic cutting board. All refrigerator models are available with S/S flat tops for undercounter and built-in applications.

All units are performance tested on the production line prior to shipping.


AIA #



Model RS-6E, RSC-6E, R-6E  
 Model RS-10E, RSC-10E, R-10E  
 Model RS-15E, RSC-15E, R-15E

REFRIGERATED  
 UNDERCOUNTER UNITS

SIDE VIEW

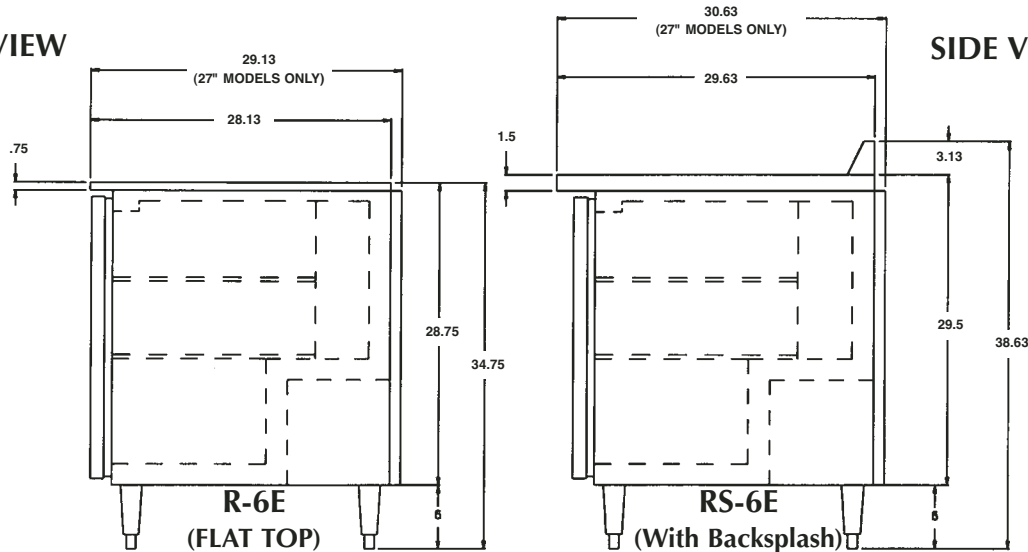

SIDE VIEW

### STATISTICS

#### Single Door

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Shelf Area (Sq. Ft.)	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
RS-6E	7	27"	30.63"	35.50"	7	S/S Top & Backsplash	1/5	1440	6.0	205 lbs.
RSC-6E	7	27"	30.63"	35.50"	7	S/S Top & Backsplash w/Cutting Board	1/5	1440	6.0	215 lbs.
R-6E	7	27"	29.13"	34.75"	7	S/S Flat Top Underctr	1/5	1440	6.0	205 lbs.

#### Two Door ( 45" )

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Shelf Area (Sq. Ft.)	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
RS-10E	12	45"	29.63"	35.50"	12.74	S/S Top & Backsplash	1/5	1440	8.0	285 lbs.
RSC-10E	12	45"	29.63"	35.50"	12.74	S/S Top & Backsplash w/Cutting Board	1/5	1440	8.0	295 lbs.
R-10E	12	45"	28.13"	34.75"	12.74	S/S Flat Top Underctr	1/5	1440	8.0	285 lbs.

#### Two Door ( 59" )

Model	Capacity (Cu. Ft.)	Length	Depth	Wrkg. Ht.	Shelf Area (Sq. Ft.)	Top	Comp HP	BTUH*	Cabinet Amps	Shipping Weight
RS-15E	16	59"	29.63"	35.50"	17.2	S/S Top & Backsplash	1/5	1440	7.0	320 lbs.
RSC-15E	16	59"	29.63"	35.50"	17.2	S/S Top & Backsplash w/Cutting Board	1/5	1440	7.0	320 lbs.
R-15E	16	59"	28.13"	34.75"	17.2	S/S Flat Top & Underctr	1/5	1440	7.0	320 lbs.

### Bidding Specifications

115 volt, 60 Hertz, 1 phase, 6'-0" (1.85 m.) power cord and plug. (NEMA 5-15)  
 \* Based on 90°F ambient and 20°F evaporating temperature  
 Specifications are subject to change without notice.

#### McCall Undercounter Refrigerators shall have:

Stainless steel front, door(s) and exterior ends. One-shot high-pressure, foamed in place polyurethane insulation. Automatic defrost system. All metal constructions. Self closing doors. R-134a redrigerant. One-piece removable magnetic door gaskets. 6" adjustable legs. 115V, 60 cycle, single phase, 2 adjustable, epoxy-coated shelves per section. R-134a refrigerant. Cord and plug attached.

### OPTIONS

#### Description

- Stainless steel interior
- Stainless steel exterior back and access panel
- Swivel casters: 6" height for 27" models; 3 3/4", 5" and 6" load height for 45" and 59" models.
- Dial thermometer, in back splash models only

McCall Refrigeration / 81 West Holly Street / Parsons, TN 38363

Phone (731) 847-5570 / Fax (731) 847-9012 / 1-888-REACH-IN (1-888-732-2446) / www.mccallrefrigeration.com

October 2005 / Printed in U.S.A.