



ITEM # _____	SIS # _____	AIA # _____
MODEL # _____		
PROJECT NAME _____		

WIDE BODY REACH-IN FREEZERS



1-1024F



McCall Refrigeration specification sheets are available online @ www.mccallrefrigeration.com

Model 1-1024F

Stainless steel cabinet interior and exterior front, sides and doors.

Model 2-2024F

Stainless steel cabinet exterior front, sides and doors.

Heavy gauge aluminum cabinet interior with stainless steel floors.

Model 4-4024F

Heavy gauge anodized aluminum cabinet exterior sides.

Stainless steel cabinet fronts and doors except for aluminum ends that wrap around front.

Heavy gauge aluminum cabinet interior with stainless steel floors.

Standard Features

- Top mounted compressor and evaporator coil
- Expansion valve
- Hot gas condensate evaporator
- R-404A refrigerant
- Cord and plug attached (self-contained only)
- Windrunner gradient air displacement process
- Exterior digital thermometer
- Self-closing cam-lift hinges
- Chrome-plated door handles with security locks
- 6 inch adjustable legs
- Baked epoxy-coated shelves adjustable on 1 inch centers
- Concealed light switch
- Stainless steel pilasters
- Automatic defrost
- Adjustable doorstops

Approval : _____

SPECIFICATIONS

Cabinet - Cabinets are all metal, inside and out. The top, back, and bottom are made of galvanized steel. In addition, all seams are closed and sealed, with metal edges turned away from the exposed surface. The result is an integrated structural frame. Internal corners are coved to conform to NSF standards. Automatic interior lighting is controlled by a light switch concealed in the door hinge.

Doors - Constructed of metal, refrigerator doors are self-closing and fully insulated. Their cam-lift hinges are chrome-plated and self-lubricating. Hinges also have a safety stop that holds the door open, preventing overswing. Chrome-plated pull handles have built-in cylinder locks. The full-perimeter, magnetic vinyl gaskets are removable without the use of tools. Doors easily lift off, and door perimeters have a built-in, low wattage, and anti-condensate heater. Door openings are protected by an impact-resistant, nonconductive PVC breaker strip with no exposed screws or fasteners.



Insulation - Cabinet body, doors, and evaporator coil housings are filled with pressure-injected polyurethane foam.

Interior Shelves - Three wire shelves per section are standard. Shelves have a runner spaced 3/4 inch O.C. with two reinforcing bars 8 1/2 inch O.C. Coated with 7 mils of baked-on gray epoxy. The shelves have a saline spray corrosion resistance of 600 hours. Shelves will support 250 pounds each with maximum cabinet load of 800 lbs. They are supported on stainless steel pilasters, and are adjustable on 1 inch centers. All three shelves are interchangeable and can be adjusted without tools or special parts.

Self-Contained Refrigeration - The complete refrigeration assembly is mounted on top of the cabinet behind a removable hatch cover. Refrigeration components include a hermetically sealed compressor, thermostatic expansion valve, thermostatic temperature control, high-humidity evaporator coil and

hot gas condensate evaporator. The system is balanced to maintain 0°F average internal air temperature. Windrunner gradient air displacement process provides even air flow and temperature control throughout the cabinet. All components are factory installed and tested, and supplied with an attached cord and plug, master power switch, and exterior digital thermometer.

Remote Cabinets - Standard remote units are provided with capped refrigeration lines, expansion valve, solenoid valve, electric condensate evaporator, and temperature control. Condensing unit is not included. All other features are the same as self-contained units, except power cord.

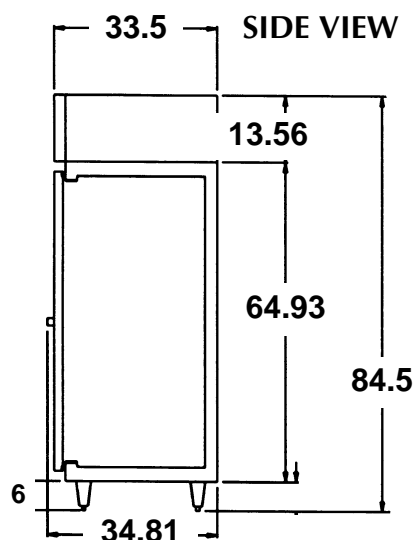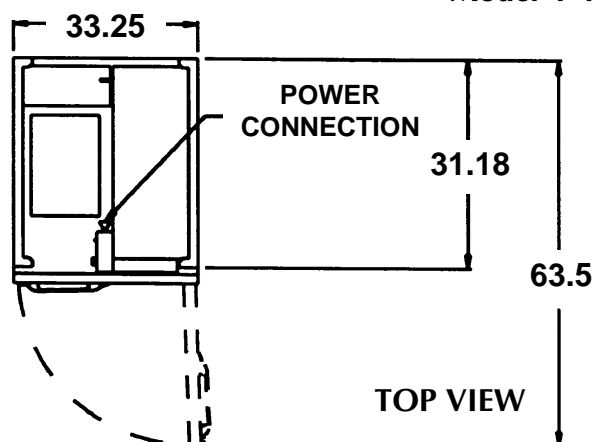

DIMENSIONS

	One Section
Net Capacity:	28.5 cu.ft.
Width:	33.25"
Height: with legs or casters	84.5"
Depth: cabinet only - including controls	31.18"
Depth: over hardware - reach-in	34.81"
Depth: over hardware - pass-thru	38.44"
Depth: door open 90° - reach-in	63.5"
Depth: door open 90° - pass-thru	96"
Net Door Opening: width	26.87"
Net Door Opening: height -full doors	58"
Net Door Opening: height - half doors	27"
Adjustable Shelves	3
Shipping Weight	
Model 1-1024F	500 lbs.
2-2024F	475 lbs.
4-4024F	410 lbs.

ELECTRICAL

One Section		Pass Thru
Base Model Number*	24F	24FP
Compressor HP	1/2	3/4
Voltage (60 hz, 1 ph)	115	115
Total Amperage:	12.4	15
BTU/HR**	1700	2870
Cord connection - ANSI	5-15P	5-20P

Notes: (R) Remote cabinets are equipped for 15 amp permanent connection.

*First 3 digits omitted.

**Based on 90°F ambient and -20°F evaporating temperature.

Specifications subject to change without notice.

Certain options and accessories may affect UL/NSF approval and electrical requirements.

Bidding Specifications

McCall Wide Body Reach In Freezer Cabinets shall have:
 Matched and balanced system. Stainless steel front, doors and floor. Self-closing all metal doors with welded and polished corners. Cam-lift hinges with concealed light switches. Adjustable doorstops. Exterior digital thermometer. Chrome-plated door handles with security lock. Stainless steel pilasters adjustable on 1" centers. Three epoxy coated shelves per section. 6" adjustable legs. Master Power Switch. R-404A refrigerant. Cord and plug attached 28.5 cubic ft. capacity. Dimensions: Width =33.25"/Height =84.5"

OPTIONS

Model Suffix	Description
01	<input type="checkbox"/> Half height doors.
C	<input type="checkbox"/> Heavy-duty 6 inch casters (on cord connected models only).
A	<input type="checkbox"/> Audio visual alarm.
P	<input type="checkbox"/> Pass-Thru.
R	<input type="checkbox"/> Remote.

Model Suffix	Description
E	<input type="checkbox"/> Electric condensate evaporator.
	<input type="checkbox"/> Finished back.
	<input type="checkbox"/> Tray slides _____
	<input type="checkbox"/> Stainless steel shelves.
	<input type="checkbox"/> _____ extra epoxy coated shelves.
	<input type="checkbox"/> Left or right door hinge.
	<input type="checkbox"/> _____