

**McCALL®**

# Solid Door Two- Section Dual Temp Refrigerator/ Freezer Reach-Ins



MCCDRL2-S

- Aluminum interior and exterior, stainless front
- Built in door locks with heavy duty strikes
- Low profile metal door handle
- Pressure relief valve is standard to prevent door vapor lock
- Two exterior digital thermometers
- Easy to use electromechanical control
- Key lock shroud for easy access to refrigeration system
- Three epoxy coated wire shelves per section
- Tough ABS interior door liners
- 10' attached cord and plug
- 6" polyurethane casters standard
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Energy savings door heater switch
- One year parts & labor warranty
- Five year compressor warranty



## Solid Door Two-Section Dual Temp Refrigerator/Freezer Reach-Ins

### Specifications

MODEL	DESCRIPTION	VOLTAGE	AMPS	STORAGE CU.FT.	SHELVES SQ.FT.	NO. OF SHELVES	UNIT H.P.	BTU/HR SYSTEM CAP	SHIP WEIGHT	NEMA PLUG	ENERGY (KWH)
MCCDRL2-S, MCCDRL2-SH	LEFT DR REF RIGHT DR FRZ	115	15.0	24.96 24.96	12.81 12.81	3 3	1/4 1/2	2092 1516	730lbs (331kg)	5-20P	N/A

### Specifications

**Exterior:** Models shall have corrosion resistant aluminum on exterior cabinet sides and will have stainless front and shroud.


**Interior:** Cabinet interior shall be corrosion resistant heavy gauge aluminum. Bottom and top surfaces shall be die stamped to provide radius corners and recessed floor. Three epoxy coated wire shelves are provided per section. Shelves rest on clips which are adjustable on 1" increments on stainless steel pilasters affixed to the cabinet interior. Pilasters are removable without tools for cleaning. Mounted to the interior ceiling of each compartment, the interior incandescent lights are controlled automatically through a switch mounted in the hinge assembly to protect against breakage. An air duct shall be mounted to the ceiling assuring low velocity, even air movement throughout the cabinet interior.

**Doors:** Exterior shall be corrosion resistant stainless steel. Interior liner is a resilient high impact, easily cleanable ABS material. Each door has two edge mount, self closing, cam lift style hinges. Doors can be removed from the cabinet without the use of tools. Metal door handle is a low profile design minimizing impact on aisle space. Keyed door lock is mounted in the door next to the handle. Lock engages into a heavy duty strike mounted to the cabinet face. Door gaskets are magnetic and mount to the door snapping in place and are removable without tools.

**Refrigeration system:** Each compartment has its own separate refrigeration system. Condensing units are located on top of the cabinet, outside the food zone, behind the removable upper shroud. Evaporator coils are located inside the cabinet mounted to the interior ceiling of each compartment. Defrost is automatic. Condensate travels down a tube in the cabinet side wall to a receptacle mounted to the exterior bottom of the cabinet where it is evaporated with the aid of an electric heater. Each compartment's temperature is individually monitored and controlled using an electronic temperature control, which provides improved pull down times, reduces compressor cycling and longer compressor life with lower energy consumption. Two exterior digital thermometers display temperature. Refrigerator compartment maintains between 27°F and 40°F. Freezer compartment maintains temperature between -5°F and 0°F.

**Electrical:** Unit comes with one 10' cord and plug with single point connection to all cabinet and refrigeration system electronics. It is attached to a junction box mounted on the exterior top of the cabinet.

**Casters:** Units are standard with 6" high polyurethane casters.

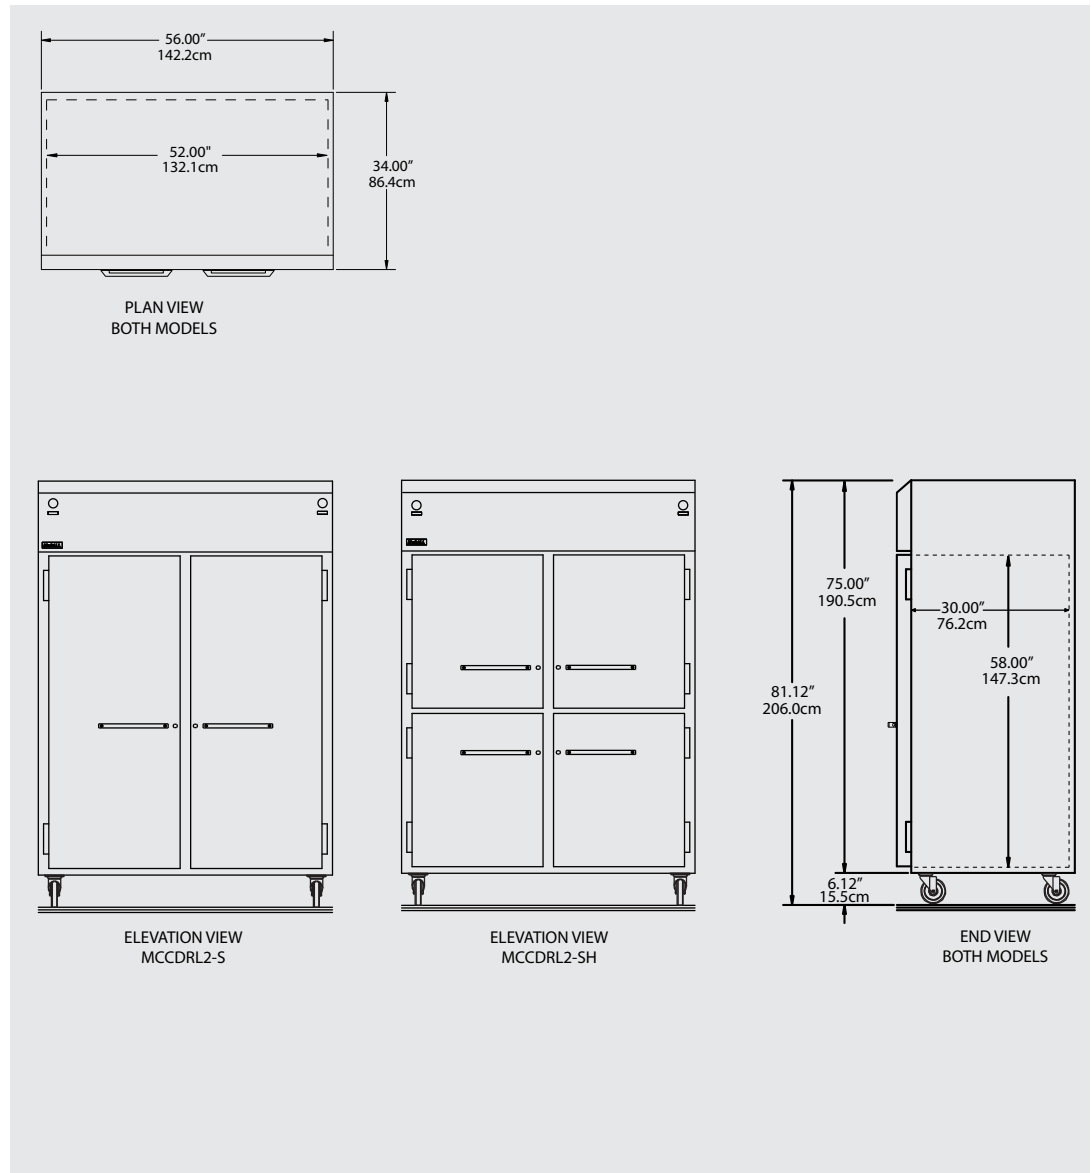

McCall reserves the right to make changes to the design or specifications without prior notice.