

McCALL®

Solid Door Single Section Dual Temp Refrigerator/ Freezer Reach-Ins



MCCDTR1-SH

- Aluminum interior and exterior, stainless front
- Built in door locks with heavy duty strikes
- Low profile metal door handle
- Pressure relief valve is standard to prevent door vapor lock
- Two exterior digital thermometers
- Easy to use electromechanical control
- Key lock shroud for easy access to refrigeration system
- Three epoxy coated wire shelves per section
- Tough ABS interior door liners
- 10' attached cord and plug
- 6" polyurethane casters standard
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Energy savings door heater switch
- One year parts & labor warranty
- Five year compressor warranty



Solid Door Single Section Dual Temp Refrigerator/Freezer Reach-Ins

Specifications

MODEL	DESCRIPTION	VOLTAGE	AMPS	STORAGE CU.FT.	SHELVES SQ.FT.	NO. OF SHELVES	UNIT H.P.	CABINET BTU/HR	BTU/HR SYSTEM CAP	SHIP WEIGHT	NEMA PLUG	ENERGY (KWH)
MCCDTR1-SH	Top Refrigerator Bottom Freezer	115/60/1	14.0	11.52ft ³ 11.52ft ³	4.23 4.23	2 2	1/5 1/3	455 744	1543 1260	525lbs (238kg)	5-20P	N/A
MCCDBR1-SH	Bottom Refrigerator Top Freezer	115/60/1	14.0	11.52ft ³ 11.52ft ³	4.23 4.23	2 2	1/5 1/3	455 744	1543 1260	525lbs (238kg)	5-20P	N/A

Specifications

Exterior: Models shall have corrosion resistant aluminum on exterior cabinet sides and will have stainless front and shroud.


Interior: Cabinet interior shall be corrosion resistant heavy gauge aluminum. Bottom and top surfaces shall be die stamped to provide radius corners and recessed floor. Three epoxy coated wire shelves are provided per section. Shelves rest on clips which are adjustable on 1" increments on stainless steel pilasters affixed to the cabinet interior. Pilasters are removable without tools for cleaning. Mounted to the interior ceiling of each compartment, the interior incandescent lights are controlled automatically through a switch mounted in the hinge assembly to protect against breakage.

Doors: Exterior shall be corrosion resistant stainless steel. Interior liner is a resilient high impact, easily cleanable ABS material. Each door has two edge mount, self closing, cam lift style hinges. Doors can be removed from the cabinet without the use of tools. Metal door handle is a low profile design minimizing impact on aisle space. Keyed door lock is mounted in the door next to the handle. Lock engages into a heavy duty strike mounted to the cabinet face. Door gaskets are magnetic and mount to the door snapping in place and are removable without tools.


Refrigeration system: Each compartment has its own separate refrigeration system. Condensing units are located on top of the cabinet, outside the food zone, behind the removable upper shroud. Evaporator coils are located inside the cabinet mounted to the interior ceiling of each compartment. Defrost is automatic. Condensate travels down a tube in the cabinet side wall to a receptacle mounted to the exterior bottom of the cabinet where it is evaporated with the aid of an electric heater. Each compartment's temperature is individually monitored, controlled, and displayed on the exterior of the cabinet. Refrigerator compartment maintains between 33°F and 41°F. Freezer compartment maintains temperature between 0°F and -5°F.

Electrical: Unit comes with one 10' cord and plug with single point connection to all cabinet and refrigeration system electronics. It is attached to a junction box mounted on the exterior top of the cabinet.


Casters: Units are standard with 6" high polyurethane casters.



PLAN VIEW

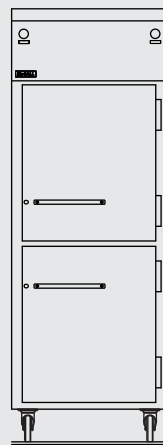

ELEVATION VIEW

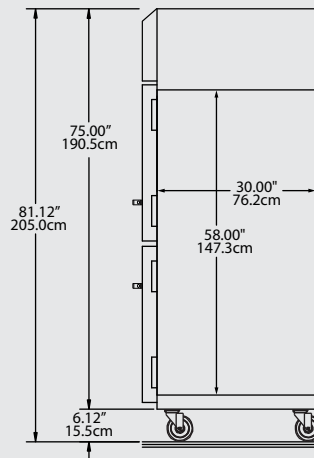

END VIEW

McCall reserves the right to make changes to the design or specifications without prior notice.